


## LIGHT FIXTURE MOUNTING CHANNEL DETAILS

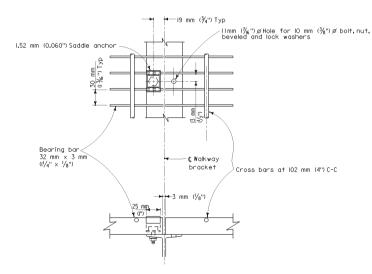

## NOTES

25

- 1) Welded type grating shall have 32 mm  $\times$  3 mm ( $1\frac{1}{4}$ "  $\times$   $\frac{1}{8}$ ") bearing bars at 30 mm ( $1\frac{1}{4}$ ") centers with 6 mm ( $1\frac{1}{4}$ ") diameter (or equal) cross bars at 102 mm (4") centers. If mechanical lock grating is used, it shall be equal in strength to the welded type. Alternate hold-down clips may be submitted for
- 2) Walkway grating and light fixture mounting channels to be continuous (no splices) over as many walkway brackets as practicable consistent with fabrication, ease of handling and assembly.

## WALKWAY DETAILS

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
OVERHEAD SIGNS

## WALKWAY DETAILS NO. 2

These "Standard Plans for Construction of Local Streets and Roads" contain units in two systems of measurement: International System of Units (SI or "metric") and United States Standard Measures shown in the parentheses (). The measurements expressed in the two systems are not necessarily equal or interchangeable. See the "Foreword" at the beginning of this publication.

NO SCALE